


**Versaclad/Traditional Weatherboard Wall Cladding  
BPIR Product Statement - Class 1**

**1. Company Details**

Spanbild New Zealand Limited  
 112 Waterloo Road,  
 Hornby,  
 Christchurch 8042  
<https://www.spanbild.com/contact.html>  
[info@spanbild.co.nz](mailto:info@spanbild.co.nz)  
 Ph: 03 349 5700  
 NZBN: 9429039686824

**2. Product Name & Product Codes**

Roll-formed Weatherboard Wall Cladding  
 Called Versaclad for Versatile  
 Called Traditional Weatherboard for Ideal Buildings

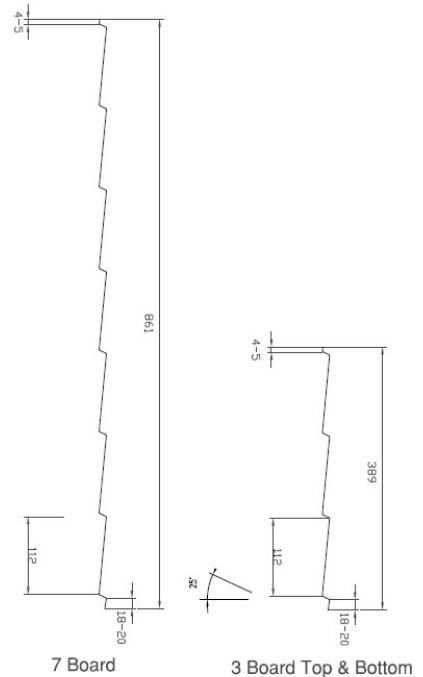

- |            |                          |                        |
|------------|--------------------------|------------------------|
| • 20207519 | Cld-Weatherboard-0.35BMT | 3 Board Desert Sand    |
| • 20206519 | Cld-Weatherboard-0.35BMT | 7 Board Desert Sand    |
| • 20207575 | Cld-Weatherboard-0.35BMT | 3 Board Sandstone Grey |
| • 20206575 | Cld-Weatherboard-0.35BMT | 7 Board Sandstone Grey |
| • 20207590 | Cld-Weatherboard-0.35BMT | 3 Board Titania        |
| • 20206590 | Cld-Weatherboard-0.35BMT | 7 Board Titania        |
| • 20207505 | Cld-Weatherboard-0.35BMT | 3 Board Zinalume       |
| • 20206505 | Cld-Weatherboard-0.35BMT | 7 Board Zinalume       |

**0.4BMT Only for Ideal Buildings**

- |            |                         |                        |
|------------|-------------------------|------------------------|
| • 20328119 | Cld-Weatherboard-0.4BMT | 3 Board Desert Sand    |
| • 20328019 | Cld-Weatherboard-0.4BMT | 7 Board Desert Sand    |
| • 20328175 | Cld-Weatherboard-0.4BMT | 3 Board Sandstone Grey |
| • 20328075 | Cld-Weatherboard-0.4BMT | 7 Board Sandstone Grey |
| • 20328190 | Cld-Weatherboard-0.4BMT | 3 Board Titania        |
| • 20328090 | Cld-Weatherboard-0.4BMT | 7 Board Titania        |

### 3. Product Description & Use

Versaclad/Traditional Weatherboard is a roll formed weatherboard is manufactured from NZ Steel Colorsteel Endura & Zinalume as a wall cladding. The profile is described as a 117mm traditional weatherboard. It is classified as a lightweight wall cladding suitable for garages, sleepout & commercial construction.

#### Key Technical Specifications:

- NZ Steel Colorsteel Endura & Zinalume
- 0.35mm BMT
- Maximum length 3.45m
- 3 board & 7 board
- Cold roll formed using prime grade G300 steel (300 mPa minimum yield stress)
- Garages - Direct Fixed often no underlay is required, can be used as bracing.
- Sleepouts - 0.4BMT for lined sleepouts and must be installed over cavity.

Basis of Compliance		
NZ Building Code Clauses	Compliance Statement	Demonstrated By
B1/AS1 Structure B1.3.1, B1.3.2, B1.3.3 (a,b,c,d,g,i)	Acceptable Solution B1/AS1	AS/NZS 1397:2011 AS/NZS 1170:2021 (for span tables)
B2/AS1 Durability B2.3.1(b), B2.3.2 (b)	Acceptable Solution B2/AS1	Coated in accordance with AS/NZS 2728:2013 (Cited in E2/AS1)
C3 Fire Affecting Area Beyond the Fire Source C/AS1, C/AS2 C3.7 (a)	Acceptable Solution C/AS1 C/AS2	Steel is non-combustible
E2/AS1 External Moisture. E2.3.2, E2.3.3, E2.3.5, E2.3.6, E2.3.7 (a,b,c)	Acceptable Solution  Alternative Solution	Largely in accordance with E2/AS1 by comparison  Alternative solution by in service history use
F2/AS1 Hazardous Building Materials F2.3.1	Alternative Solution	Coating system is inert once dry Colorsteel safety data sheet

Scope	Limitations
In all wind zones as defined in NZS 3604:2011	Versaclad/Traditional Weatherboard Cladding 1000mm stud centres = High wind max
In all exposure zones as defined in by NZS 3604:2011	Comes in Endura only so not to be used in extremely severe to severe environment categories
On Buildings located within 1m of any relevant boundary's	Versaclad/Traditional Weatherboard is non-combustible.
As a wall cladding	<p>Unlined or importance level 1 buildings can be direct fixed.</p> <p>Lined or importance level 2 buildings must be installed over a drained &amp; ventilated cavity as per E2/AS1.</p> <p>Flashings, Flexible &amp; Rigid building underlays must be in accordance with E2/AS1.</p> <p>Compatibility with other building materials must be in accordance with E2/AS1.</p>

#### 4. Installation Requirements

Before installing Versaclad/Traditional Weatherboard cladding appropriate safety measures must be undertaken in relation to working from height and Personal Protective Equipment.

##### The following items are required for installation:

- Cladding layout
- Cladding assembly guidelines and start heights
- Building construction plans
- Cladding nails or appropriate cladding gun
- Tape measure
- Builders square
- String or chalk line to mark board increments on the wall
- Hammer & nail punch
- Tin snips
- Drill, revits & Pop riveter
- Sealant and caulking gun
- Spirit Level
- Personal Protective Equipment (PPE) i.e. gloves, hearing protection, safety glasses


### Key Installation Requirements:

- Refer to cladding layout sheet for location of boards.
- Using start heights as specified in building instructions it is imperative that all board positions be either marked with a chalk line or string line on the wall which will help show if boards are creeping.
- As Versaclad/Traditional Weatherboard is supplied cut to length as per cladding layout, if altering is required on site always ensure you double check that it is required before cutting any sheets on site.
- For long length board two people are required to install cladding as this will reduce the likelihood of damage to boards.
- Do not carry the boards on the flat, carry in the vertical position to avoid excessive bending.
- Ensure board is located properly before nailing off.

### Fixing & Installation:

Studs at 1000crs fixed to studs 117mm vertically at every board.


### NAILING PATTERN

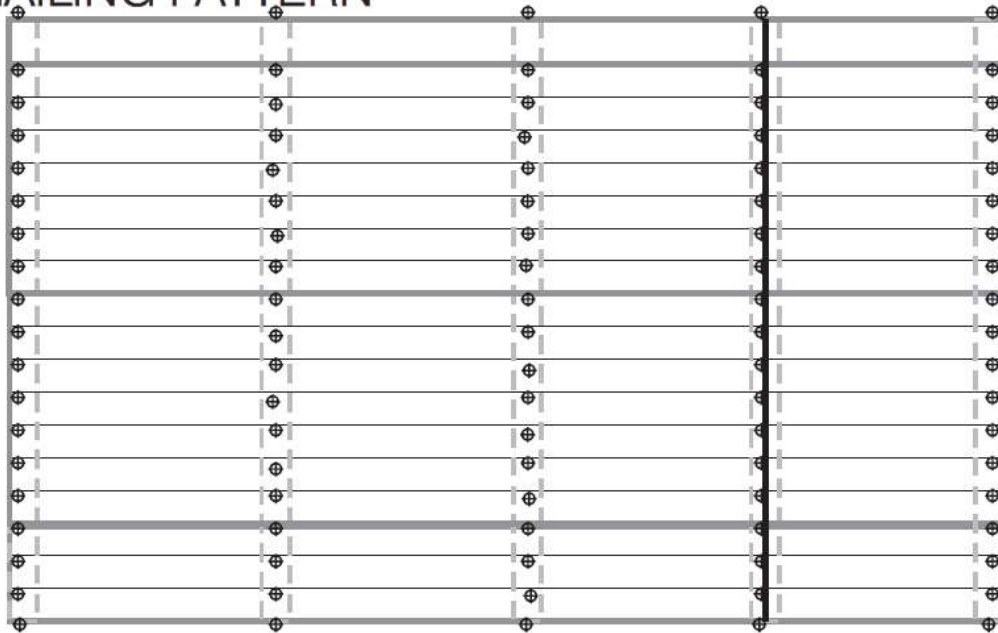

Studs at 600crs:

- end of sheet, vertical sheet laps & around openings fixed to studs 117mm vertically at every board.
- intermediate studs fix horizontal sheet laps and every second board vertically eg 234mm

## NAILING PATTERN

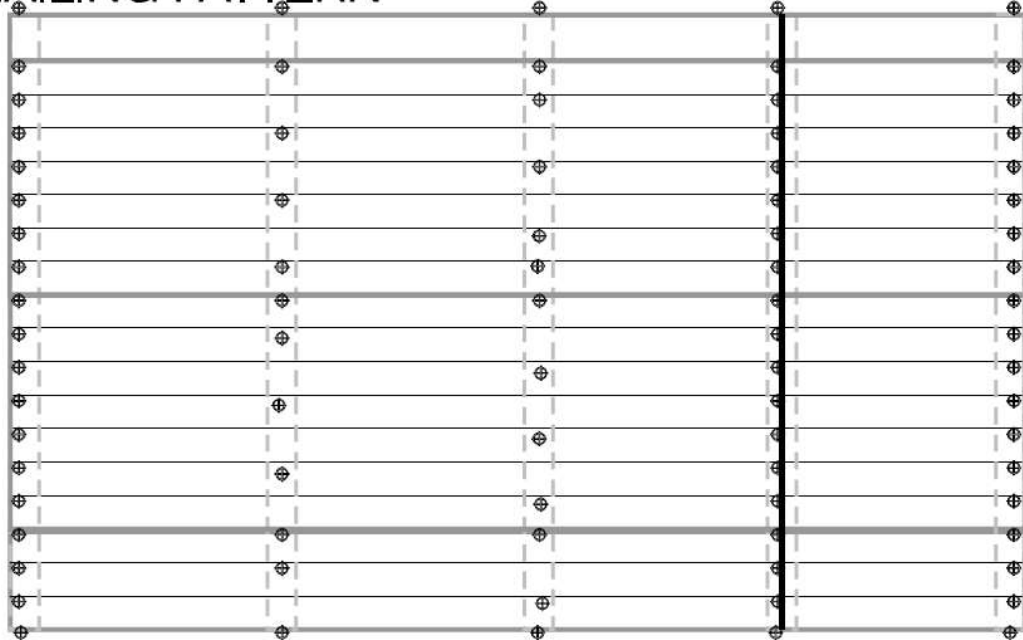

### Nail Size & Fixing Method:

- Versaclad/Traditional Weatherboard cladding is fixed with 32x2.8mm galvanised flat head clouts and can be either hand nailed or nailed using an appropriate cladding gun that uses collated 32x2.8mm galvanised flat head clouts.
- All concealed nails must be driven flush with the board surface.

### Gun Nailing:

- Versaclad/Traditional Weatherboard can be nailed using an appropriate cladding gun that uses collated 32x2.8mm galvanised flat head clouts. It is fixed in same manner mentioned above.
- When using an appropriate cladding gun it is recommended that a rubber nose protector be used on the end of the gun to stop unduly damaging the cladding sheet.

## 5. Maintenance Requirements

- Refer NZ Steel Environment Categories April 2022  
<https://www.colorsteel.co.nz/assets/Brochures/Environmental-Categories-Brochure-Mar2022-WEB.pdf>

## **6. Cladding Warnings or Bans**

Versaclad/Traditional Weatherboard does not have a ban or subject to a warning under section 26.

**Date: 1/12/2023**